


- 6-Pin SPI:**
- SCK
 - MISO
 - MOSI
 - Reset
 - GND
 - +5V
- SUB-D pinout**
- 1 -> SCK Out
 - 2 -> MISO In
 - 3 -> MOSI Out
 - 4 -> RESET Out (In)
 - 5 -> GND
 - 6 -> n.c. I/O
 - 7 -> n.c. I/O
 - 8 -> n.c. I/O
 - 9 -> VCC (+5V)

In bitbang mode, all connectors may be left floating.

Only change Rev. 2/2 -> 2/2a concern readability and crystal frequency.

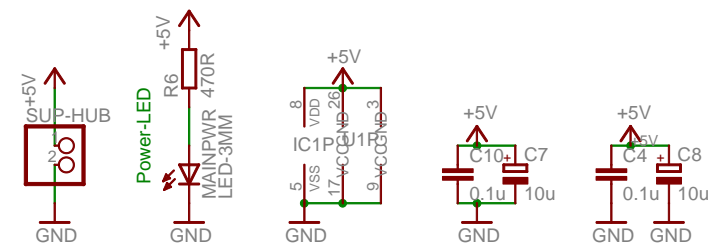

USB-AtmelPrg: Universal USB Interface Cable	
(c) 05/2004, 02,03,10/2005, 04/2007 by Wolfgang Wieser	
TITLE: USB-AtmelPrg-r2-2	
Document Number:	REV: 2/2a
Date: 4/30/2007 03:29:31	Sheet: 1/1